


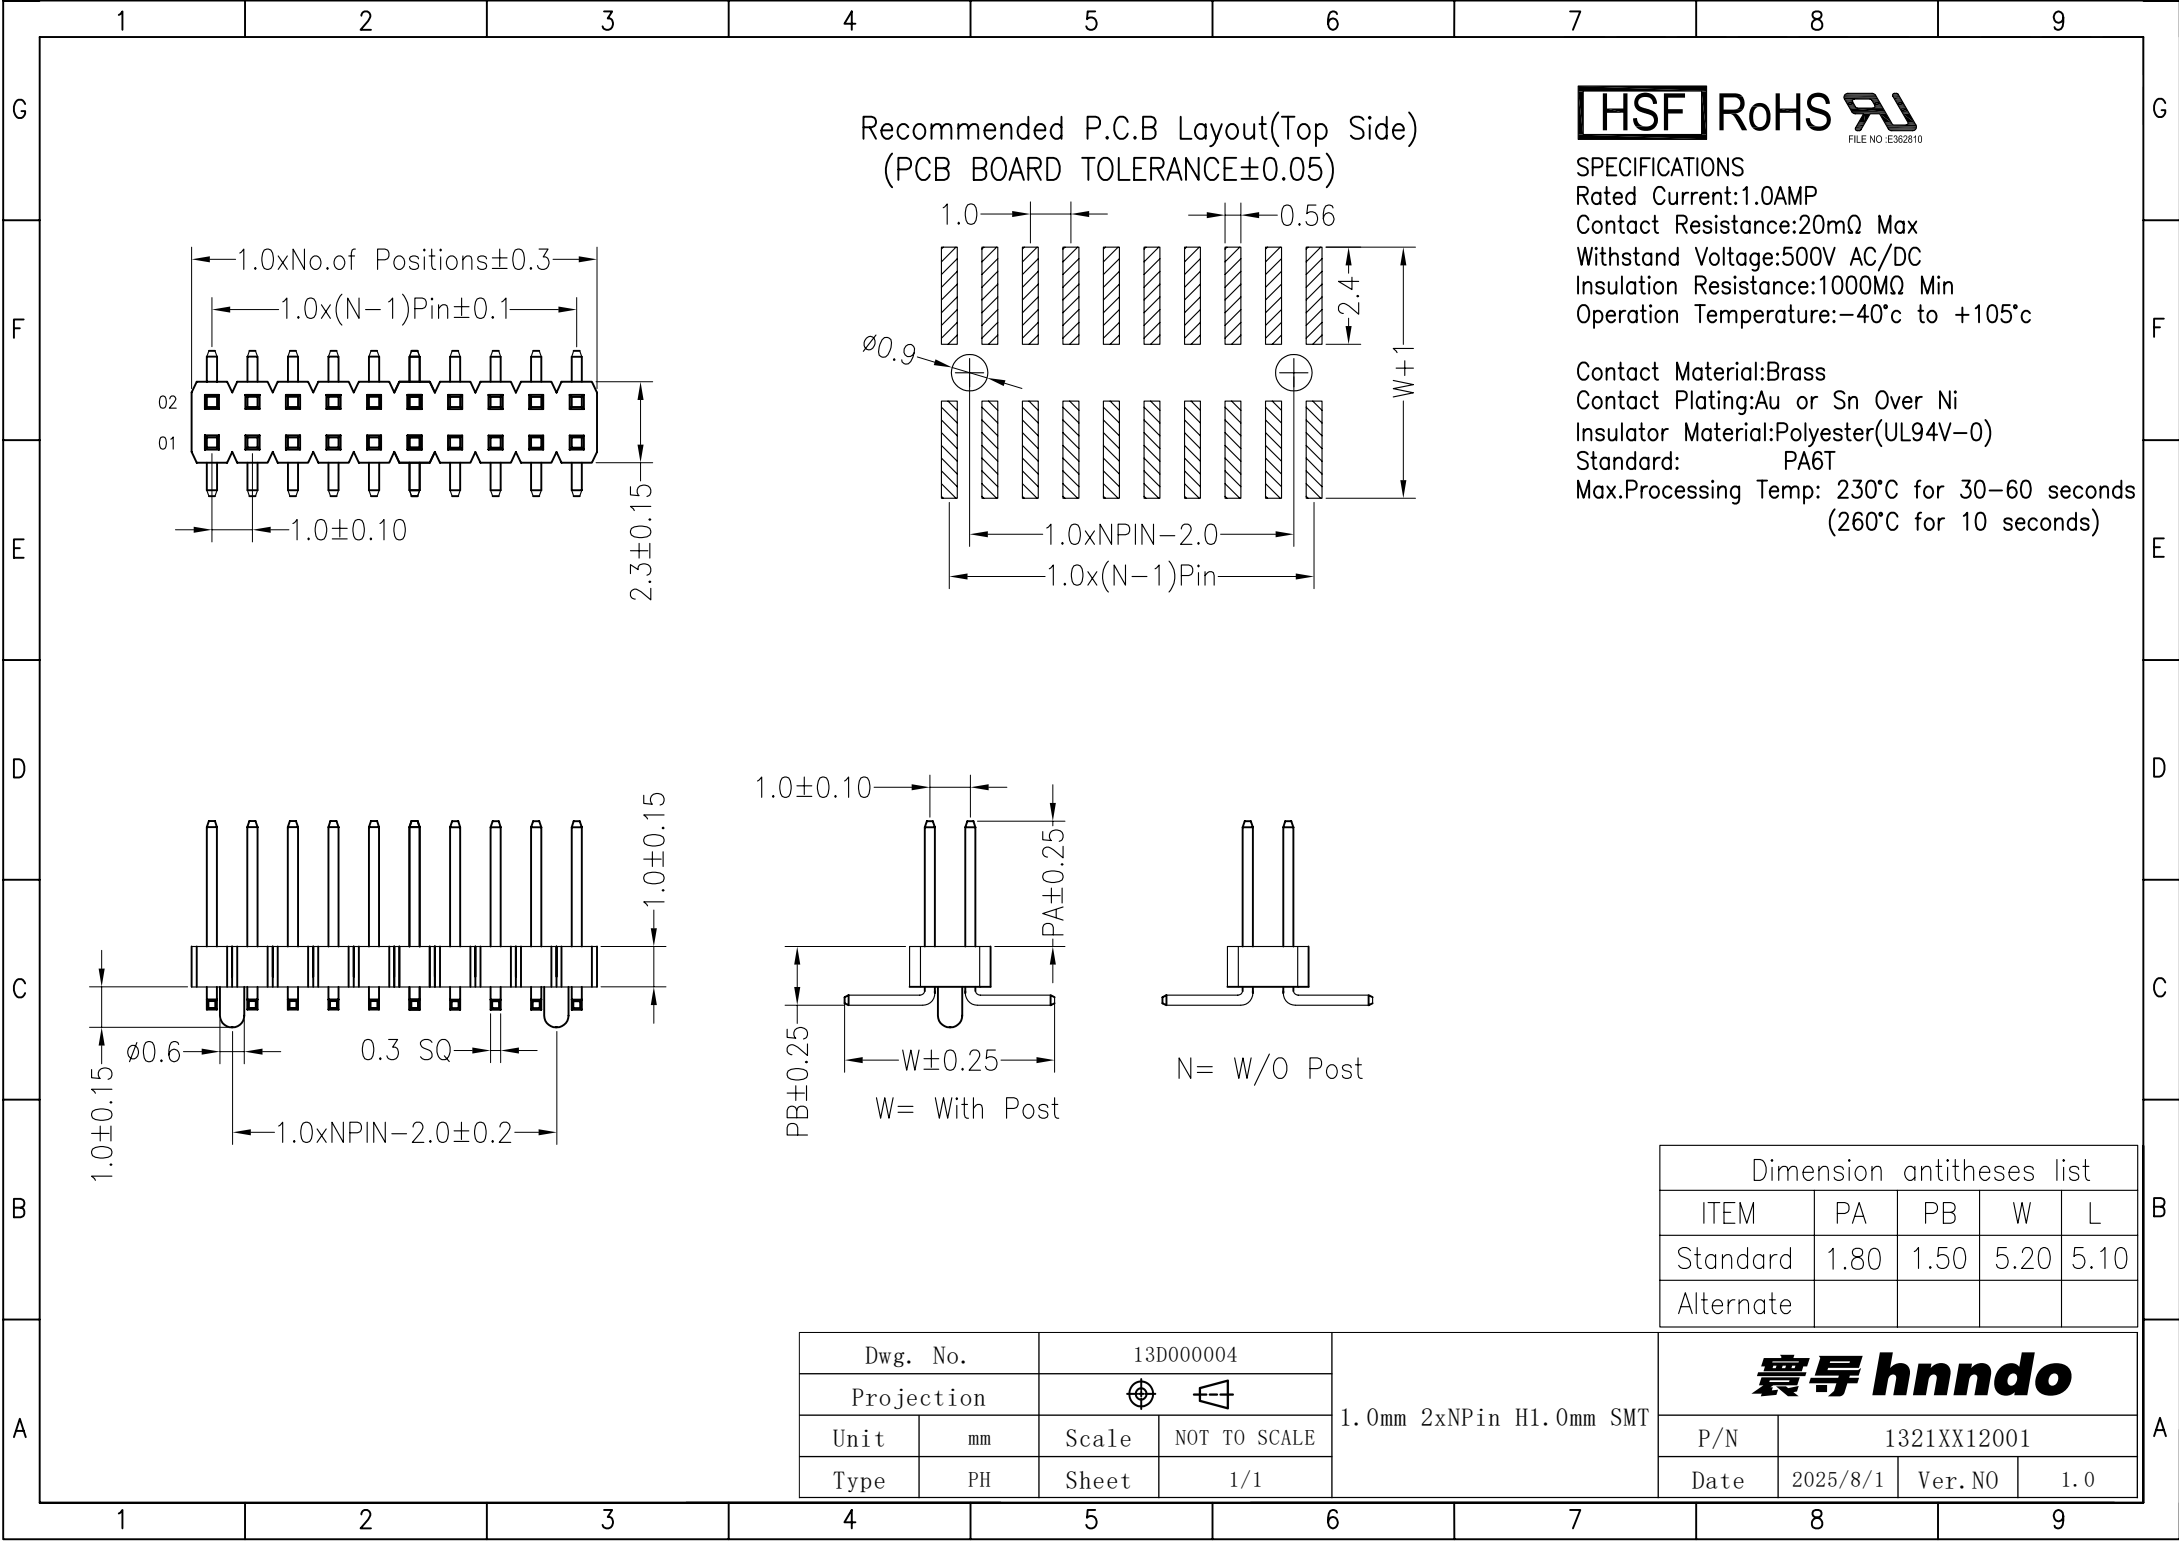

SPECIFICATIONS
Rated Current:1.0AMP
Contact Resistance:20mΩ Max
Withstand Voltage:500V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:-40°c to +105°c

Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V-0)
Standard: PA6T
Max.Processing Temp: 230°C for 30-60 seconds
(260°C for 10 seconds)

Dimension antitheses list				
ITEM	PA	PB	W	L
Standard	1.80	1.50	5.20	5.10
Alternate				

Dwg. No.		13D000004	
Projection			
Unit	mm	Scale	NOT TO SCALE
Type	PH	Sheet	1/1

1.0mm 2xNPin H1.0mm SMT	震导 hnndo			
	P/N	1321XX12001		
	Date	2025/8/1	Ver. NO	1.0