




Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE ± 0.05)

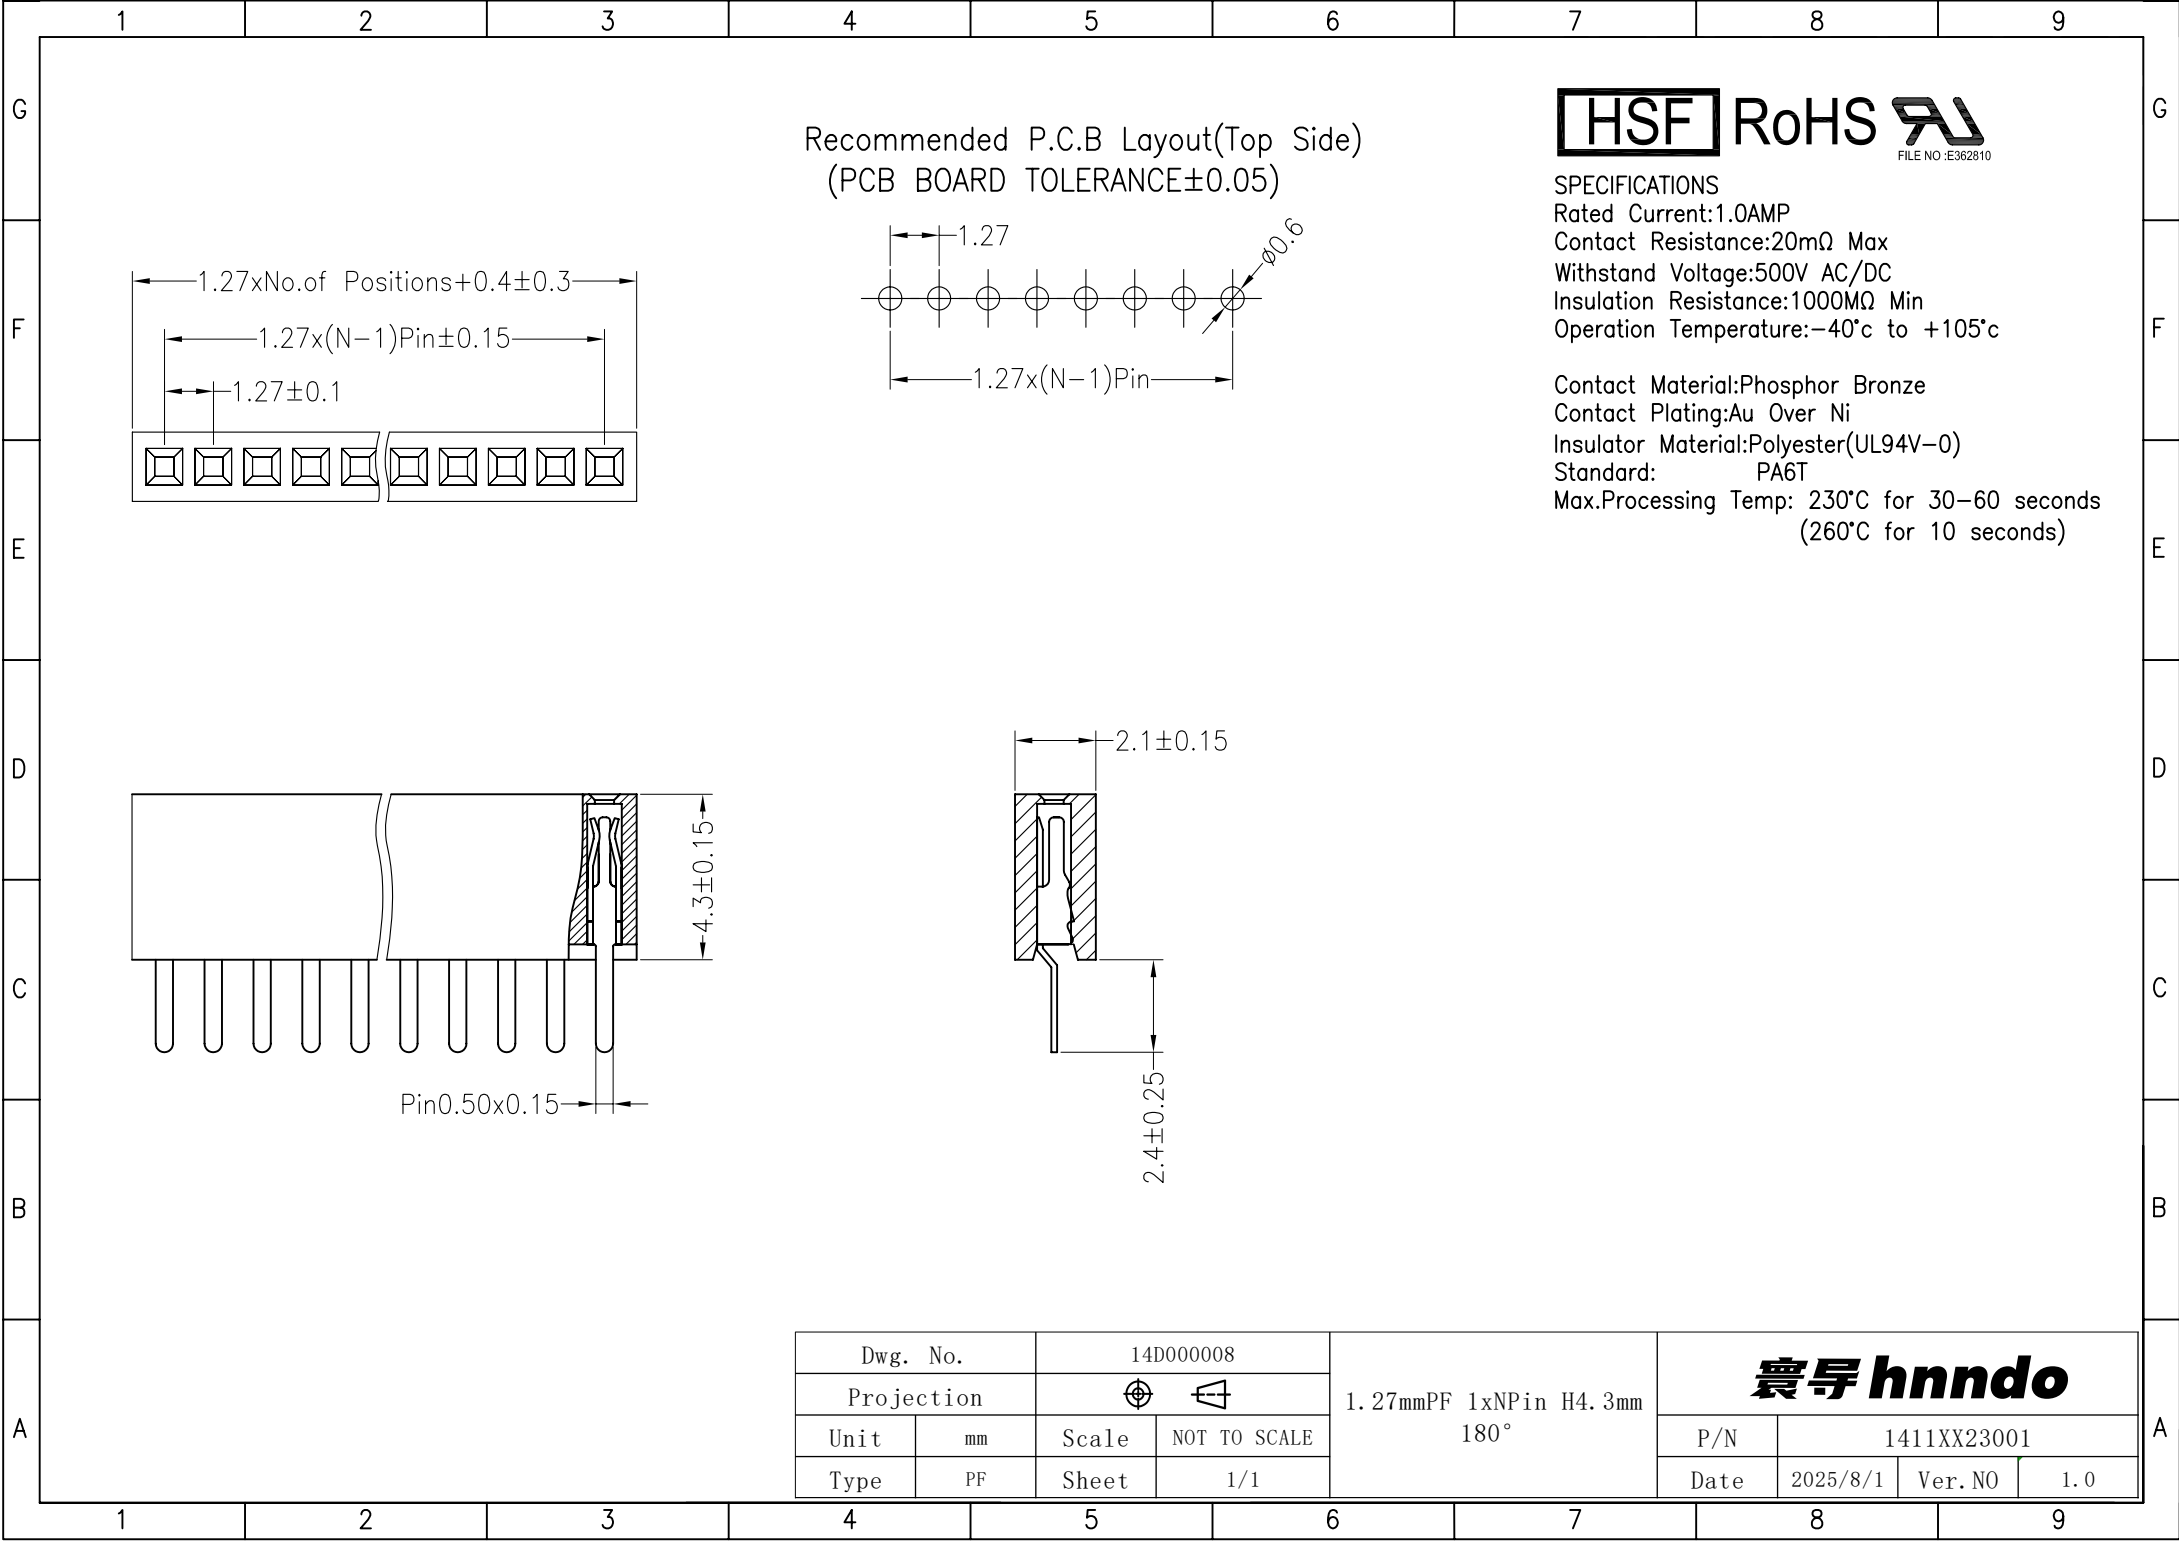

SPECIFICATIONS
Rated Current:1.0AMP
Contact Resistance:20m Ω Max
Withstand Voltage:500V AC/DC
Insulation Resistance:1000M Ω Min
Operation Temperature:-40 $^{\circ}$ c to +105 $^{\circ}$ c

Contact Material:Phosphor Bronze
Contact Plating:Au Over Ni
Insulator Material:Polyester(UL94V-0)
Standard: PA6T
Max.Processing Temp: 230 $^{\circ}$ C for 30-60 seconds
(260 $^{\circ}$ C for 10 seconds)

Dwg. No.		14D000008		1.27mmPF 1xNPin H4.3mm 180°	寰宇 <i>hnndo</i>			
Projection								
Unit	mm	Scale	NOT TO SCALE		P/N	1411XX23001		
Type	PF	Sheet	1/1		Date	2025/8/1	Ver. NO	1.0