
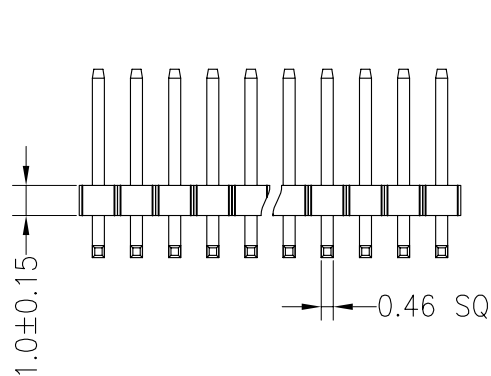
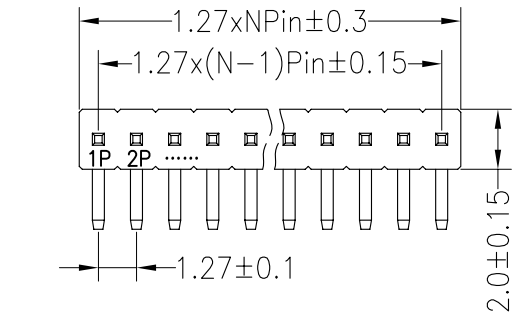


Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE ± 0.05)

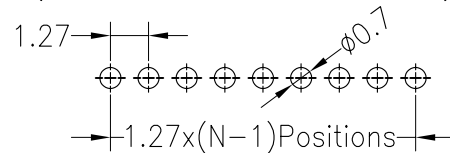

SPECIFICATIONS

Rated Current:1.0AMP
Contact Resistance:20m Ω Max
Withstand Voltage:500V AC/DC
Insulation Resistance:1000M Ω Min
Operation Temperature:-40 $^{\circ}$ c to +105 $^{\circ}$ c

Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V-0)
Standard: PA6T
Max.Processing Temp: 230 $^{\circ}$ C for 30-60 seconds
(260 $^{\circ}$ C for 10 seconds)

Dimension antitheses list				
ITEM	PC	PA	PB	L
Standard	2.60	4.00	3.40	10.50
Alternate				

Dwg. No.		13D000005		1.27mm PH H1.0mm 1xNPin 90°	實導 hnndo			
Projection								
Unit	mm	Scale	NOT TO SCALE		P/N	1311XX33001		
Type	PH	Sheet	1/1		Date	2025/8/1	Ver. NO	1.0