



1 2 3 4 5 6 7 8 9

G

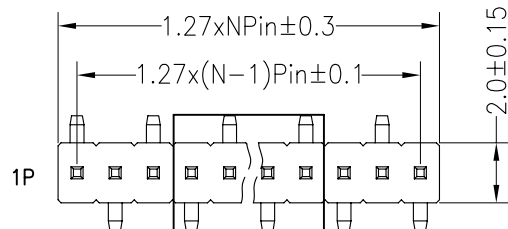

F

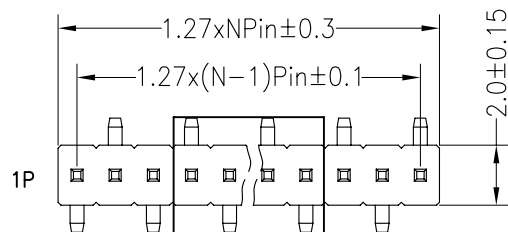


E

D


C

B



A

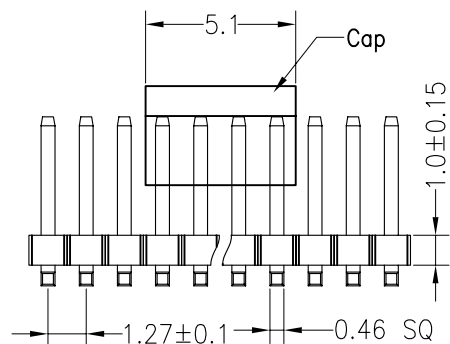

TYPE2

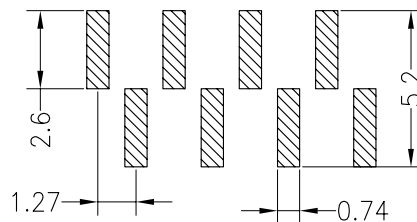

TYPE1

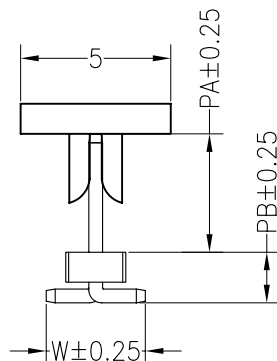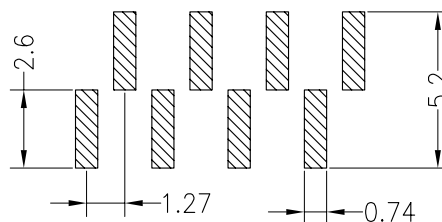

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)



SPECIFICATIONS

Rated Current:1.0AMP

Contact Resistance:20mΩ Max

Withstand Voltage:500V AC/DC

Insulation Resistance:1000MΩ Min

Operation Temperature:-40°c to +105°c

Contact Material:Brass

Contact Plating:Au or Sn Over Ni

Insulator Material:Polyester(UL94V-0)

Standard: PA6T

Max.Processing Temp: 230°C for 30-60 seconds
(260°C for 10 seconds)

Dimension antitheses list

ITEM	PA	PB	W	L
Standard	4.00	1.50	4.20	7.20
Alternate				

Dwg. No.		13D000007	
Projection			
Unit	mm	Scale	NOT TO SCALE
Type	PH	Sheet	1/1

1.27mm PH H1.0mm 1xNPin
SMT 带夹持盖

寰宇 hnndo

P/N	1311XX13001		
Date	2025/8/1	Ver. NO	1.0

1 2 3 4 5 6 7 8 9