
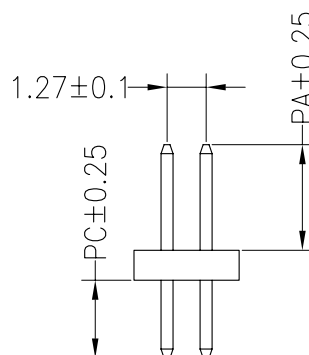
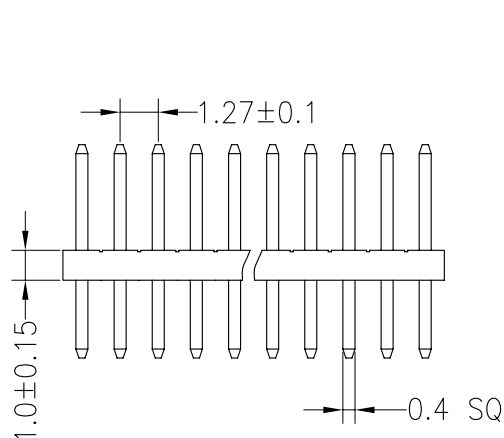


Recommended P.C.B Layout(Top Side)  
(PCB BOARD TOLERANCE±0.05)

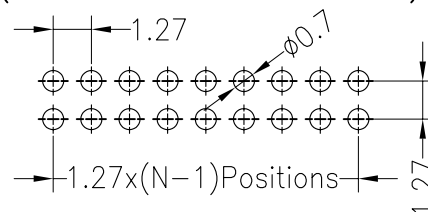

#### SPECIFICATIONS

Rated Current:1.0AMP  
Contact Resistance:20mΩ Max  
Withstand Voltage:500V AC/DC  
Insulation Resistance:1000MΩ Min  
Operation Temperature:-40°c to +105°c

Contact Material:Brass  
Contact Plating:Au or Sn Over Ni  
Insulator Material:Polyester(UL94V-0)  
Standard: PA6T  
Max.Processing Temp: 230°C for 30-60 seconds  
(260°C for 10 seconds)

#### Dimension antitheses list

| ITEM      | PA   | PC   | L    |
|-----------|------|------|------|
| Standard  | 3.90 | 2.30 | 7.20 |
| Alternate |      |      |      |

|            |    |           |              |
|------------|----|-----------|--------------|
| Dwg. No.   |    | 13D000009 |              |
| Projection |    |           |              |
| Unit       | mm | Scale     | NOT TO SCALE |
| Type       | PH | Sheet     | 1/1          |

1.27mm PH H1.0mm 2xNPin  
180°

**震導 hnndo**

|      |             |         |     |
|------|-------------|---------|-----|
| P/N  | 1321XX23001 |         |     |
| Date | 2025/8/1    | Ver. NO | 1.0 |