


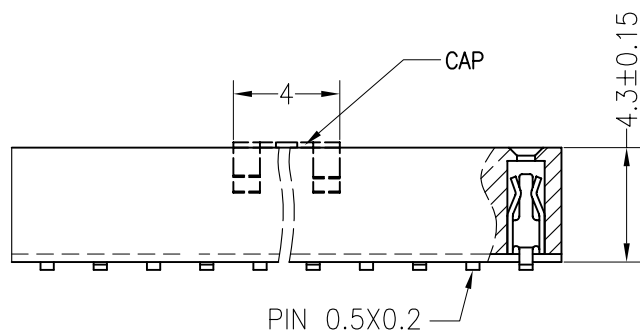
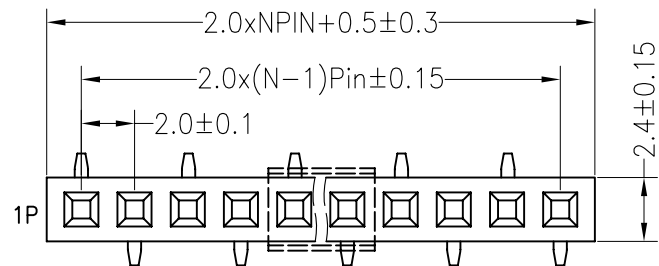


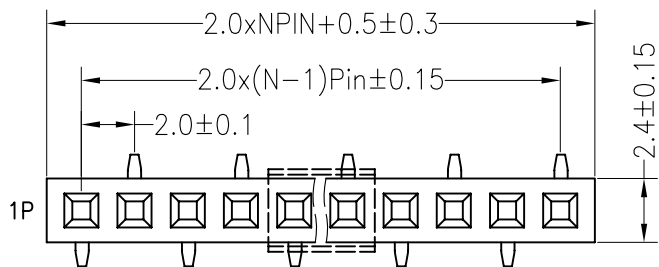


Recommended P.C.B Layout(Top Side) (PCB BOARD TOLERANCE±0.05)

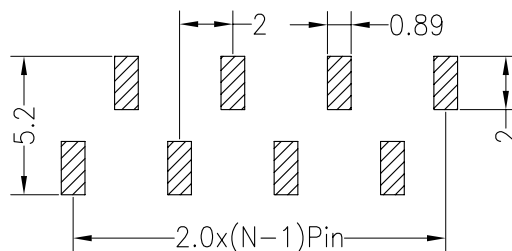

TYPE02

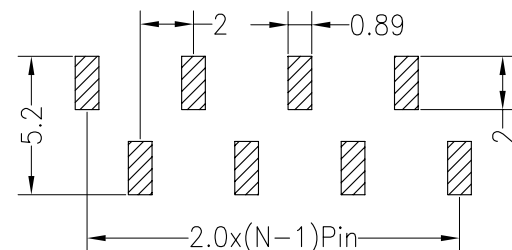

TYPE01



SPECIFICATIONS
Rated Current:1.5AMP
Contact Resistance:20mΩ Max
Withstand Voltage:500V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:-40°c to +105°c
Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V-0)
Standard: PA6T
Max.Processing Temp: 230°C for 30-60 seconds
(260°C for 10 seconds)

Dwg. No.		14D000016		2.0mmPF H4.30mm 1xNPin SMT	寰宇 hnndo			
Projection								
Unit	mm	Scale	NOT TO SCALE		P/N		1411XX14001	
Type	PF	Sheet	1/1		Date		2025/8/1	Ver. NO 1.0