
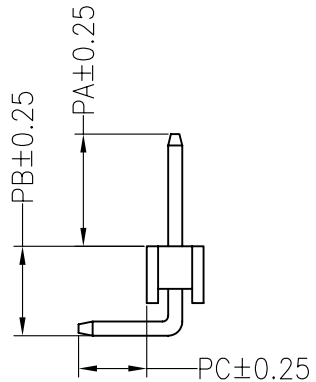
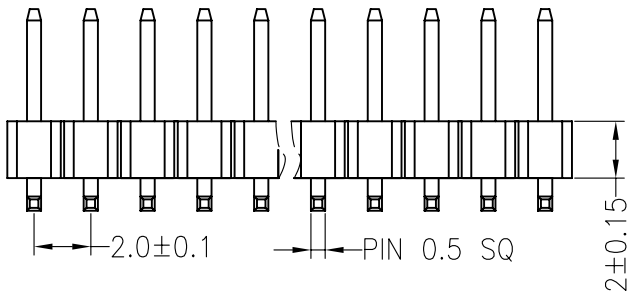
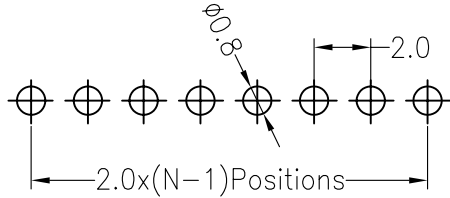


Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

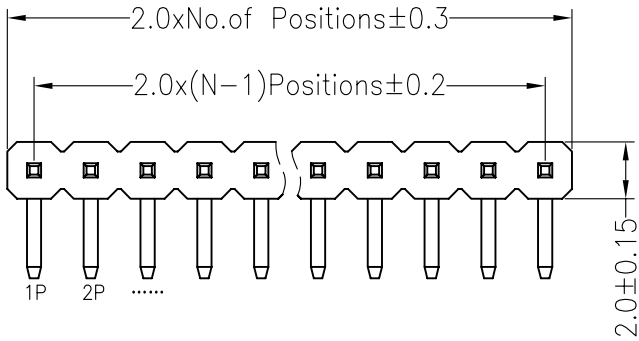

SPECIFICATIONS
Rated Current:1.5AMP
Contact Resistance:20mΩ Max
Withstand Voltage:500V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:−40°c to +105°c

Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V−0)
Standard: PA6T
Max.Processing Temp: 230°C for 30−60 seconds
(260°C for 5 seconds)

Dimension antitheses list				
ITEM	PA	PC	PB	L
Standard	4.00	2.80	3.15	10.50
Alternate				

Dwg. No.		13D000011		2.0mm PH 1xNPin H2.0mm Single 90°	寰宇 <i>hnndo</i>			
Projection								
Unit	mm	Scale	NOT TO SCALE		P/N	1311XX34001		
Type	PH	Sheet	1/1		Date	2025/8/1	Ver. NO	1.0