




Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

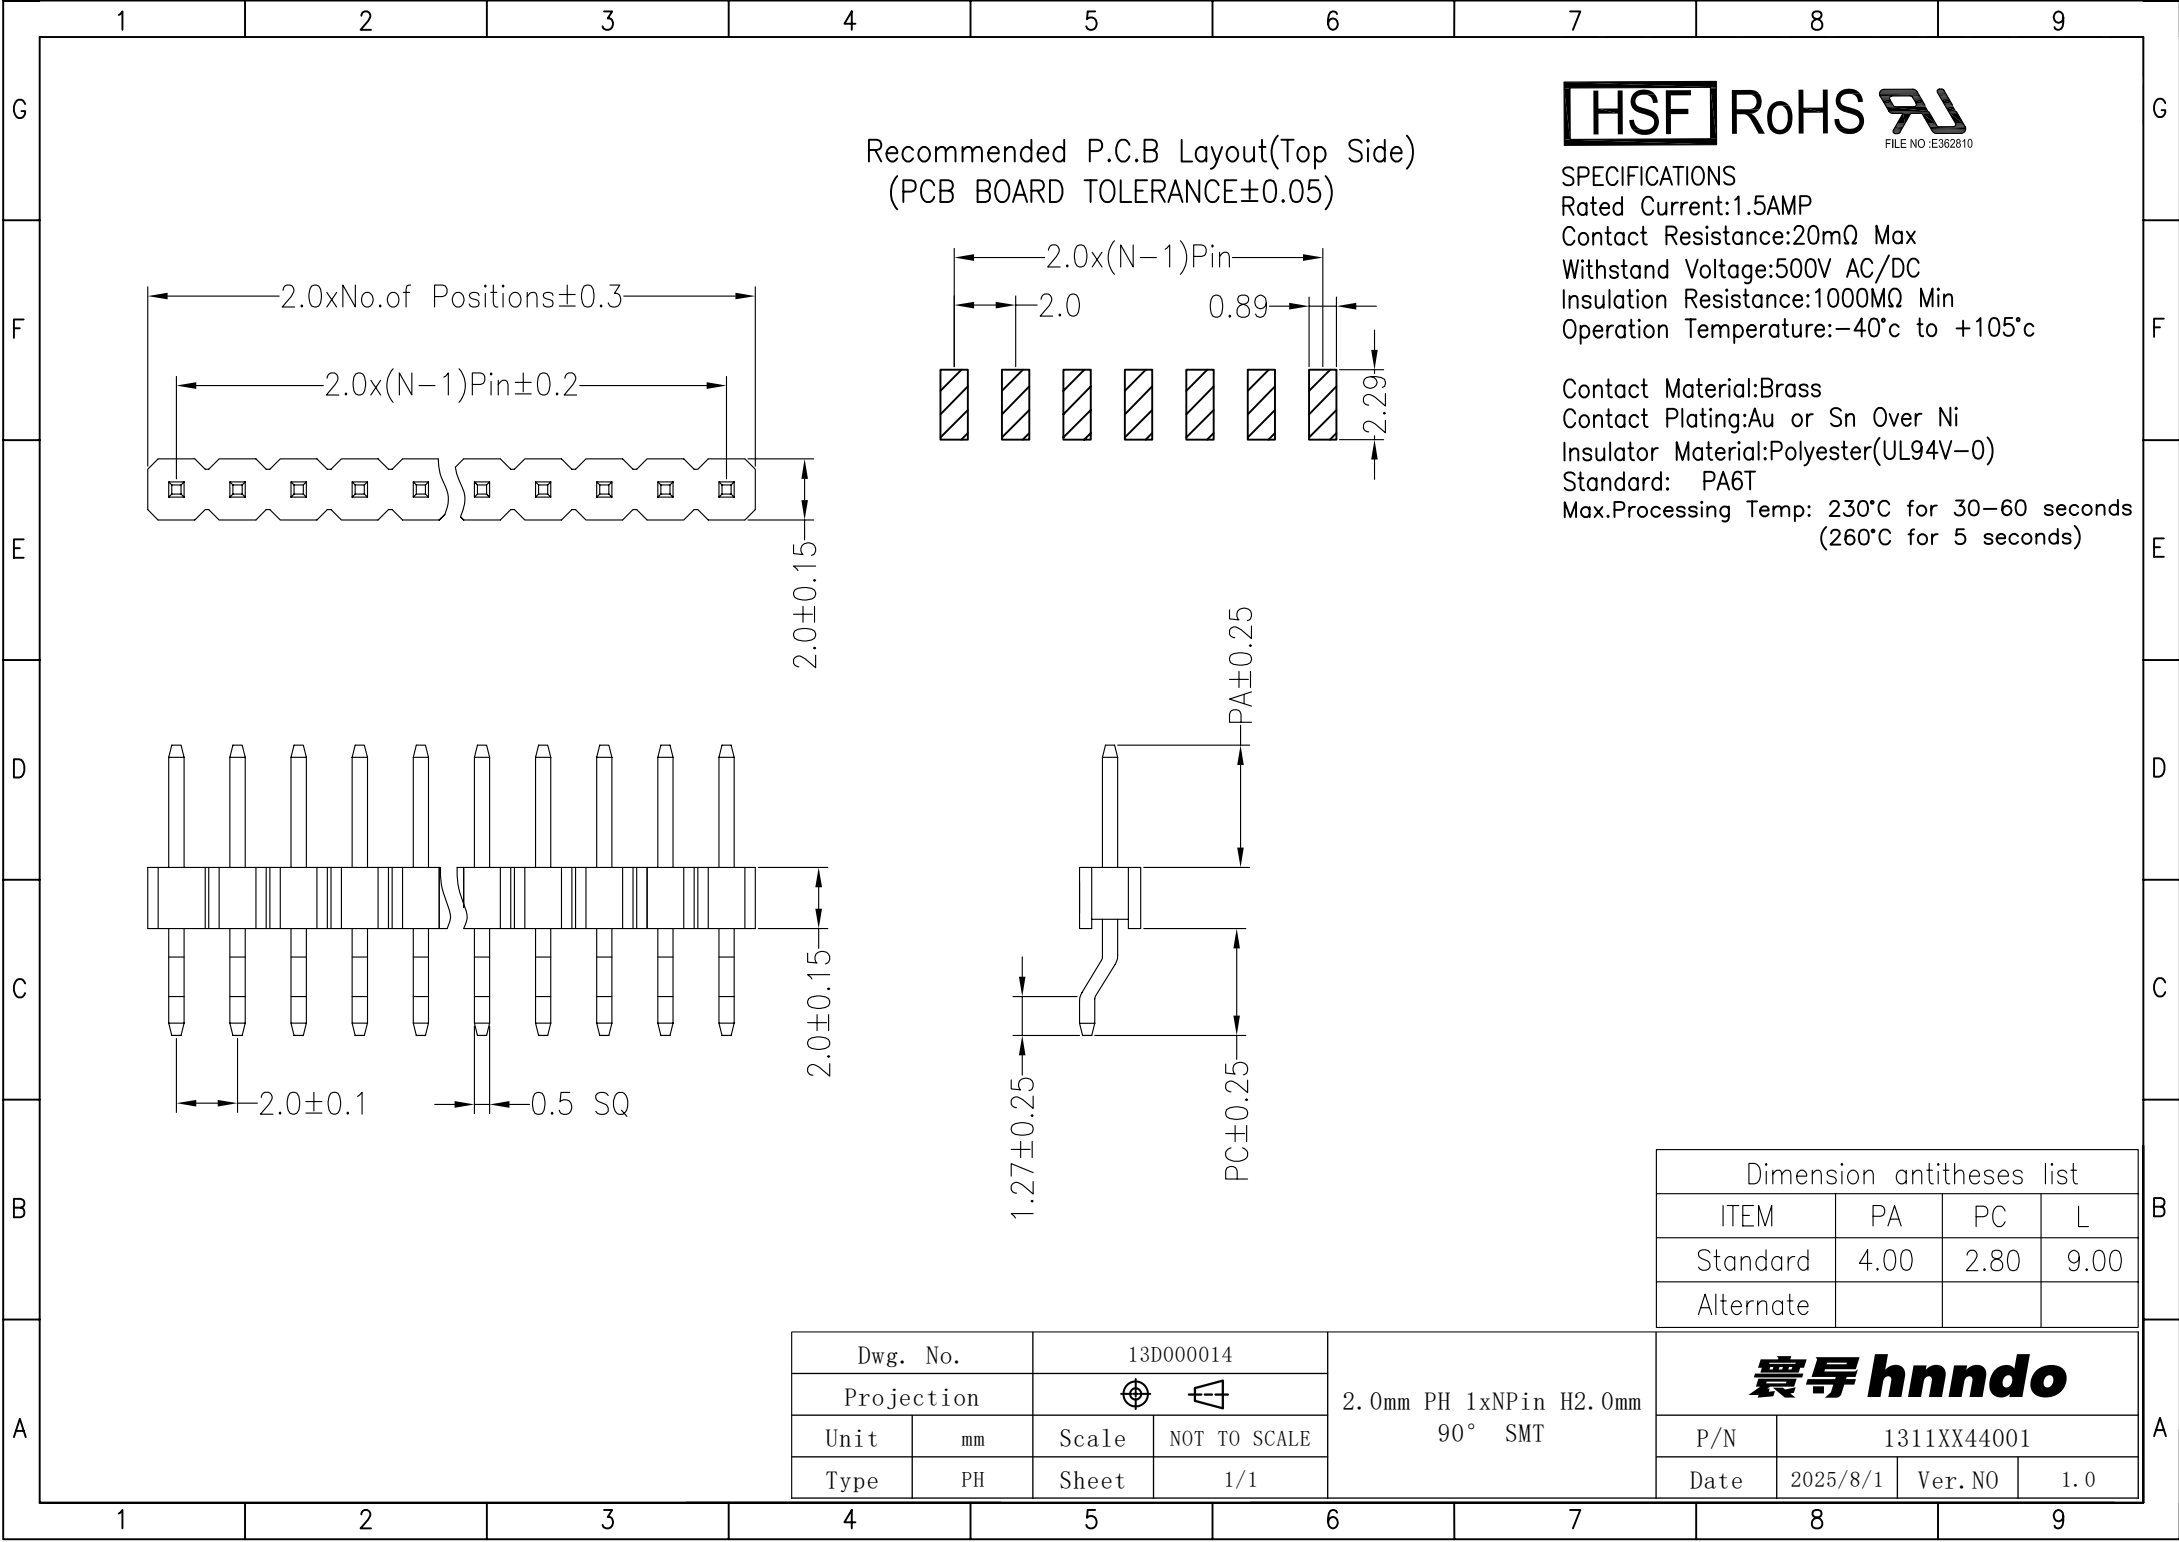

SPECIFICATIONS
Rated Current:1.5AMP
Contact Resistance:20mΩ Max
Withstand Voltage:500V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:-40°C to +105°C

Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V-0)
Standard: PA6T
Max.Processing Temp: 230°C for 30-60 seconds
(260°C for 5 seconds)

Dimension antitheses list			
ITEM	PA	PC	L
Standard	4.00	2.80	9.00
Alternate			

Dwg. No.		13D000014	
Projection			
Unit	mm	Scale	NOT TO SCALE
Type	PH	Sheet	1/1

2.0mm PH 1xNPin H2.0mm
90° SMT

寰宇 hnndo			
P/N	1311XX44001		
Date	2025/8/1	Ver. NO	1.0