
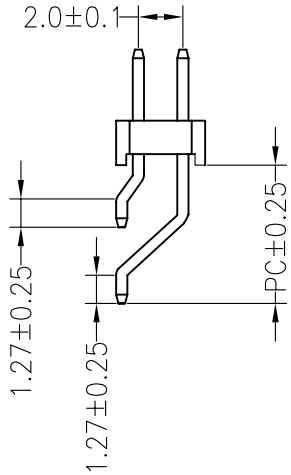
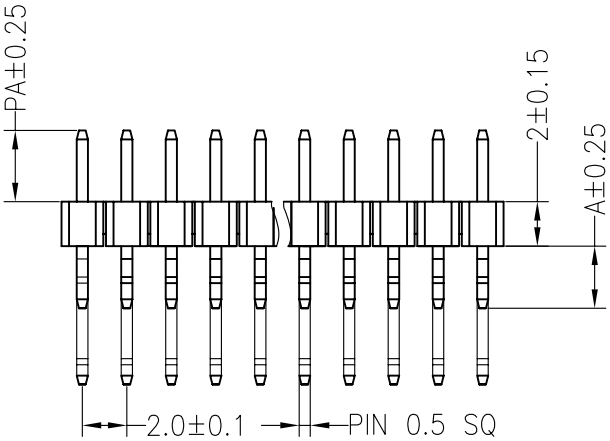
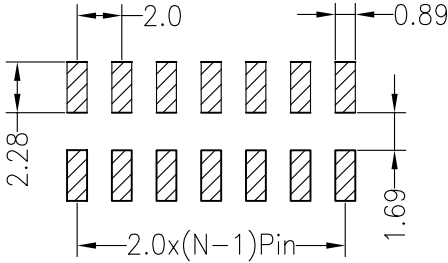


Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

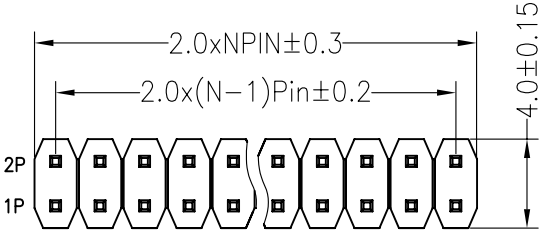

SPECIFICATIONS
Rated Current:1.5AMP
Contact Resistance:20mΩ Max
Withstand Voltage:500V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:-40℃ to +105℃

Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V-0)
Standard: PA6T
Max.Processing Temp: 230℃ for 30-60 seconds
(260℃ for 5 seconds)

Dimension antitheses list					
ITEM	PA	A	PC	L短	L长
Standard	4.00	3.40	6.60	9.50	13.50
Alternate					

Dwg. No.		13D000018		2.0mm PH 2xNPin H2.0mm 90° SMT	寰宇 <i>hnndo</i>			
Projection								
Unit	mm	Scale	NOT TO SCALE		P/N	1321XX44001		
Type	PH	Sheet	1/1		Date	2025/8/1	Ver. NO	1.0