

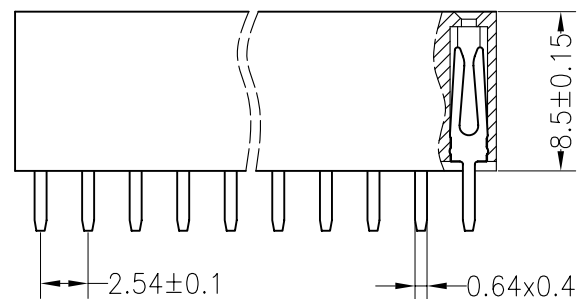


Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE ± 0.05)

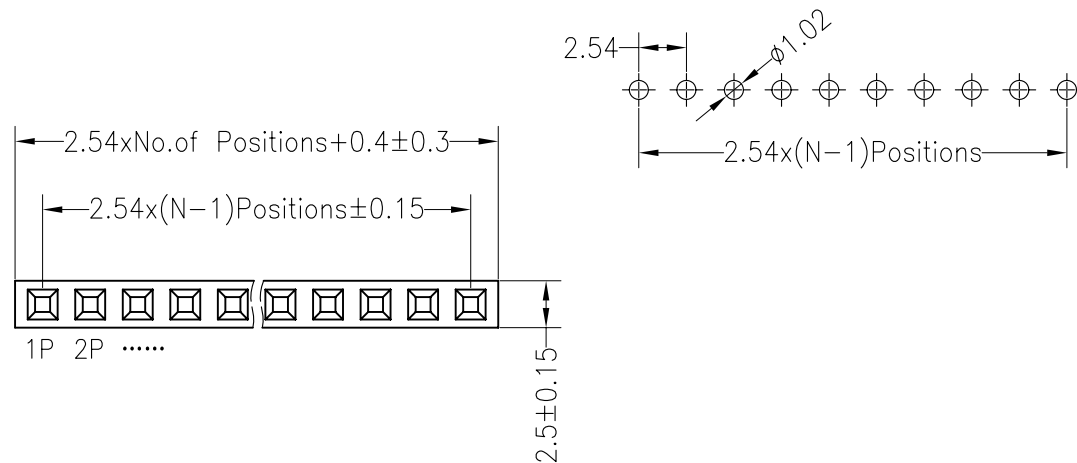

SPECIFICATIONS

Rated Current: 3.0AMP

Contact Resistance: 20m Ω Max

Withstand Voltage: 1000V AC/DC

Insulation Resistance: 1000M Ω Min

Operation Temperature: -40°C to $+105^{\circ}\text{C}$

Contact Material: Brass

Contact Plating: Au or Sn Over Ni

Insulator Material: Polyester (UL94V-0)

Standard: PA6T

Max. Processing Temp: 230°C for 30-60 seconds
(260°C for 10 seconds)

Dwg. No.		14D000018		2.54mmPF H8.5mm 1xNPin 180° W2.5mm	寰宇 <i>hnndo</i>			
Projection								
Unit	mm	Scale	NOT TO SCALE		P/N	1412XX25001		
Type	PF	Sheet	1/1		Date	2025/8/1	Ver. NO	1.0