

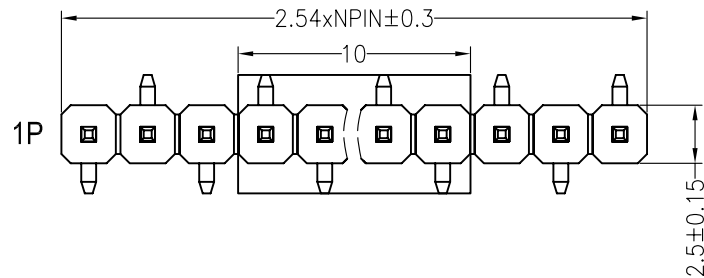





Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

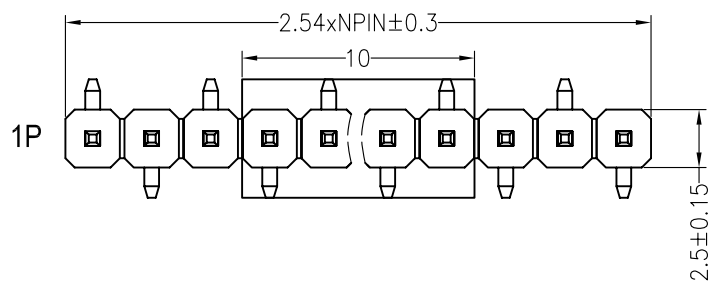

Type01

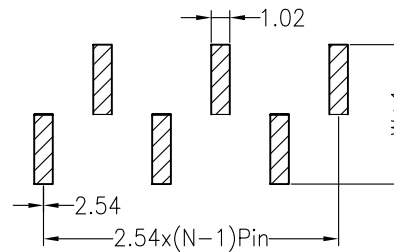

Type02

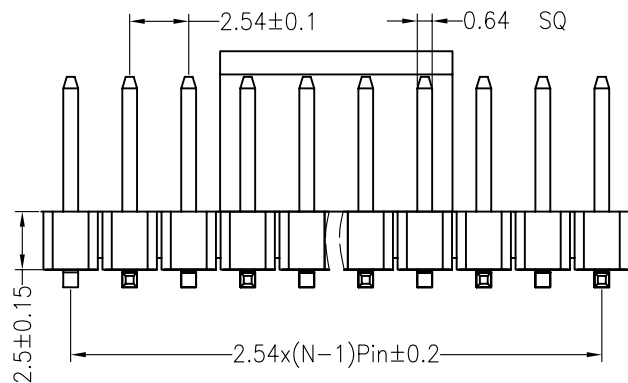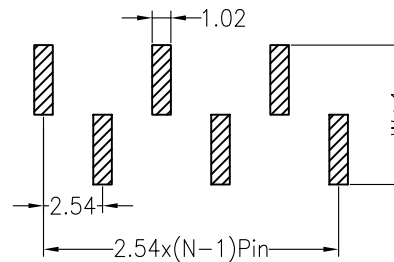

SPECIFICATIONS

Rated Current:3.0AMP

Contact Resistance:20mΩ Max

Withstand Voltage:1000V AC/DC

Insulation Resistance:1000MΩ Min

Operation Temperature:-40°c to +105°c

Contact Material:Brass

Contact Plating:Au Over Ni

Insulator Material:Polyester(UL94V-0)

Standard: PA6T

Max.Processing Temp: 230°C for 30-60 seconds
(260°C for 10 seconds)

Dimension antitheses list

ITEM	PA	PB	W	L
Standard	6.00	3.20	5.00	11.00
Alternate				

Dwg. No.		13D000021	
Projection			
Unit	mm	Scale	NOT TO SCALE
Type	PH	Sheet	1/1

2.54mm Pin Header 2.5mm
SMT

寰宇 hnndo

P/N	1311XX15001		
Date	2025/8/1	Ver. NO	1.0