




Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

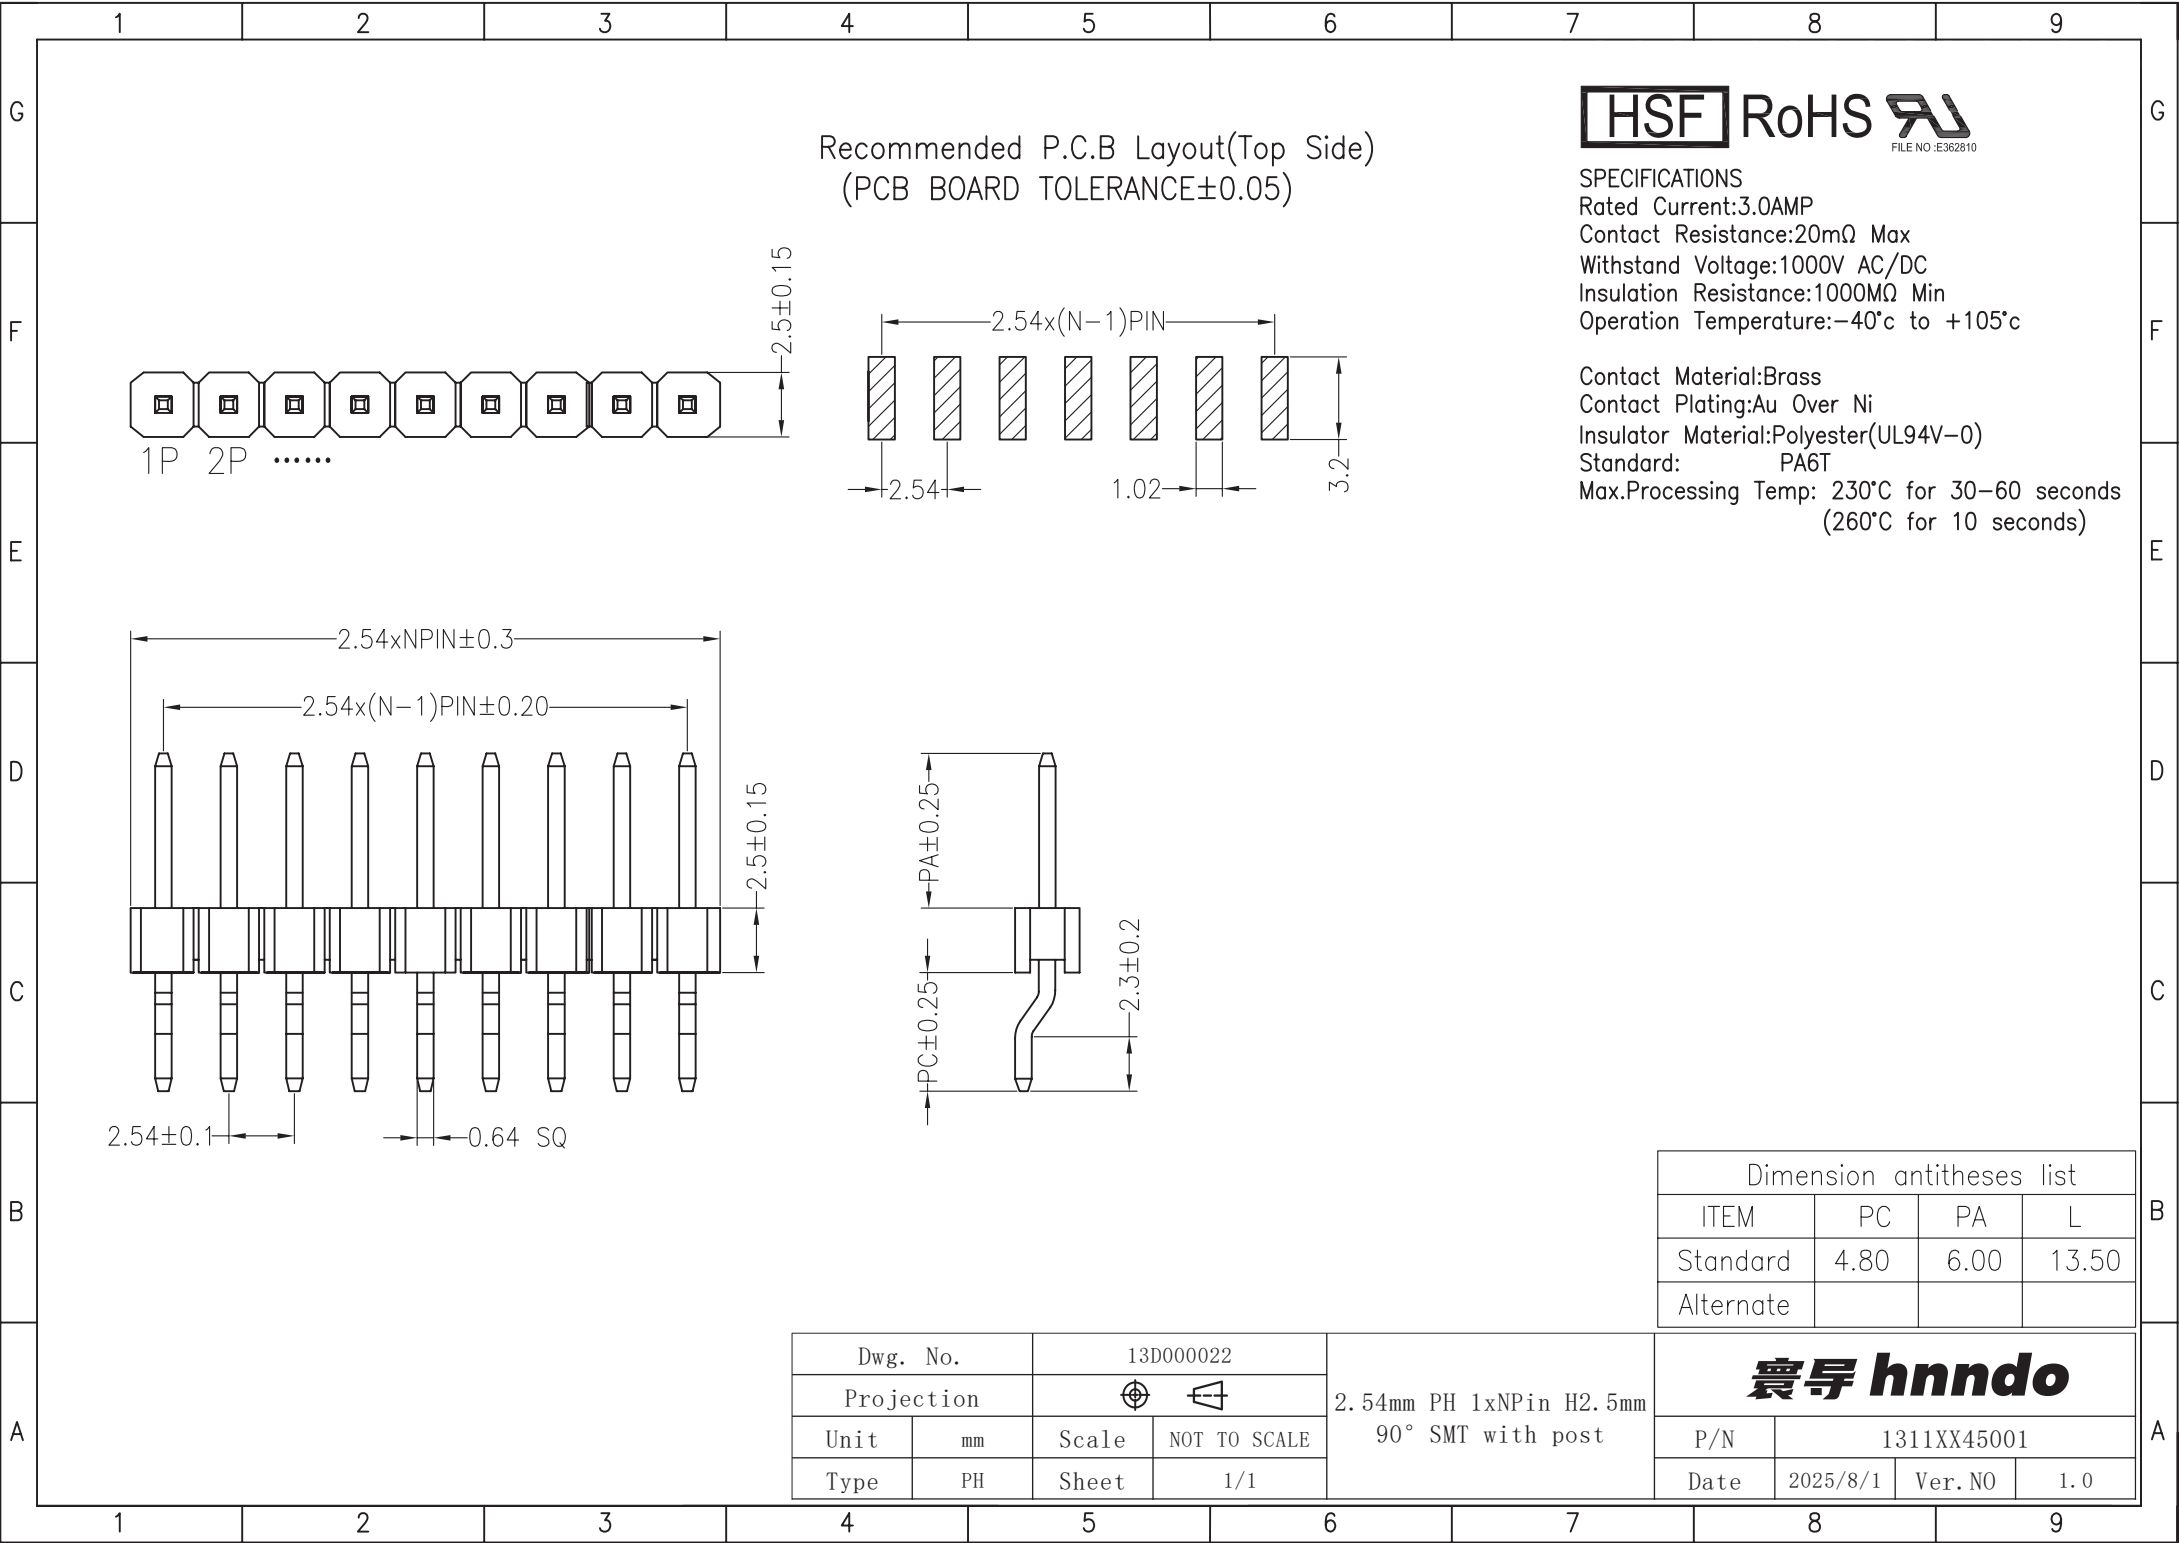

SPECIFICATIONS
Rated Current:3.0AMP
Contact Resistance:20mΩ Max
Withstand Voltage:1000V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:-40°c to +105°c

Contact Material:Brass
Contact Plating:Au Over Ni
Insulator Material:Polyester(UL94V-0)
Standard: PA6T
Max.Processing Temp: 230°C for 30-60 seconds
(260°C for 10 seconds)

Dimension antitheses list			
ITEM	PC	PA	L
Standard	4.80	6.00	13.50
Alternate			

Dwg. No.		13D000022		2.54mm PH 1xNPin H2.5mm 90° SMT with post	寰宇 <i>hnndo</i>			
Projection								
Unit	mm	Scale	NOT TO SCALE		P/N	1311XX45001		
Type	PH	Sheet	1/1		Date	2025/8/1	Ver. NO	1.0