

1 2 3 4 5 6 7 8 9

G

G

F

F

E

E

D

D

C


C

B




B

A

A

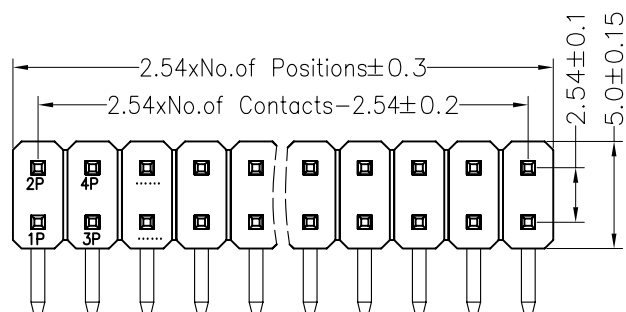

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

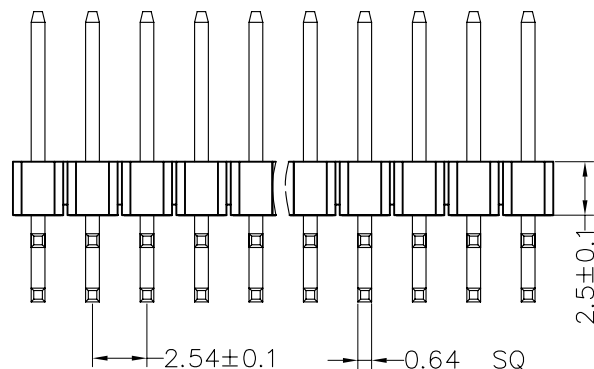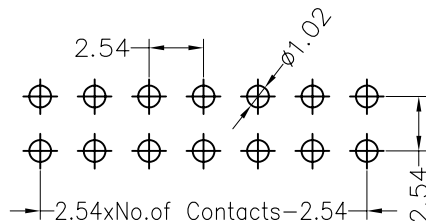

SPECIFICATIONS

Rated Current:3.0AMP

Contact Resistance:20mΩ Max

Withstand Voltage:1000V AC/DC

Insulation Resistance:1000MΩ Min

Operation Temperature:-40°c to +105°c

Contact Material:Brass

Contact Plating:Au or Sn Over Ni

Insulator Material:Polyester(UL94V-0)

Standard: PA6T

Max.Processing Temp: 230°C for 30-60 seconds
(260°C for 10 seconds)

Dimension antitheses list

ITEM	PA	PC	PB	L短	L长
Standard	6.00	3.00	6.90	13.80	18.80
Alternate					

Dwg. No.		13D000023	
Projection			
Unit	mm	Scale	NOT TO SCALE
Type	PH	Sheet	1/1

2.54mm PH H2.5mm Dual
Row 90° 正弯

寰宇 hnndo

P/N	1321XX35001			
Date	2025/8/1	Ver. NO	1.0	

1 2 3 4 5 6 7 8 9