

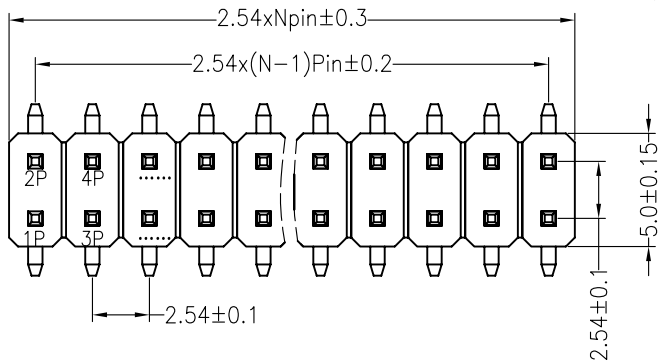



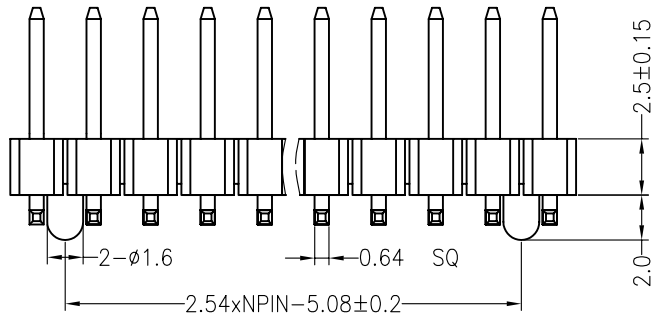

Recommended P.C.B Layout(Top Side)  
(PCB BOARD TOLERANCE±0.05)

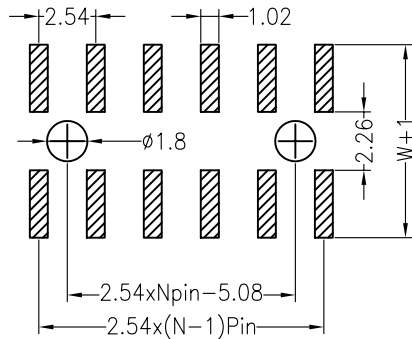

#### SPECIFICATIONS

Rated Current:3.0AMP

Contact Resistance:20mΩ Max

Withstand Voltage:1000V AC/DC

Insulation Resistance:1000MΩ Min

Operation Temperature:-40°C to +105°C

Contact Material:Brass

Contact Plating: Au or Sn Over Ni

Insulator Material: Polyester(UL94V-0)

Standard: PA6T

Max.Processing Temp: 230°C for 30-60 seconds  
(260°C for 5 seconds)

#### Dimension antitheses list

| ITEM      | PA   | PB   | W    | L     |
|-----------|------|------|------|-------|
| Standard  | 6.00 | 3.20 | 7.50 | 11.00 |
| Alternate |      |      |      |       |

|            |              |
|------------|--------------|
| Dwg. No.   | 13D000025    |
| Projection |              |
| Unit       | mm           |
| Type       | PH           |
| Scale      | NOT TO SCALE |
| Sheet      | 1/1          |

2.54mm PH 2xNPin H2.5mm  
SMT

**震导 hnndo**

|         |             |
|---------|-------------|
| P/N     | 1321XX15001 |
| Date    | 2025/8/1    |
| Ver. NO | 1.0         |