

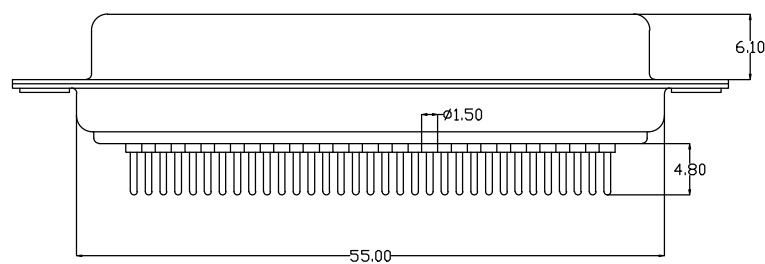
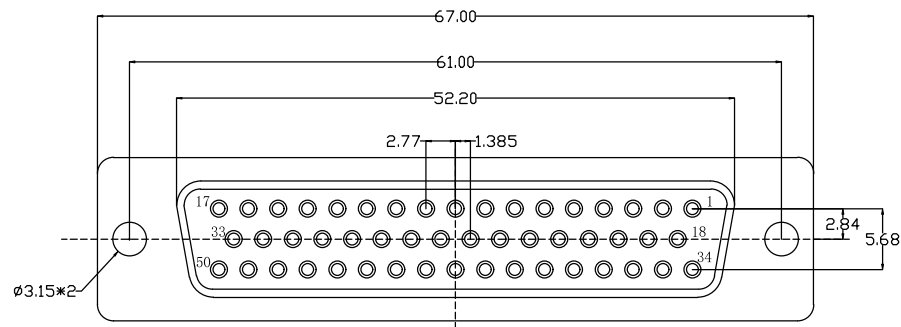


说明:

- 特性:
 - 额定电压 :500V AC MIN
 - 额定电流 :5A
 - 接触阻抗 :30mΩ MAX.
 - 绝缘阻抗 :3000Ω MIN. at 500V DC
 - 耐电压值 :700V AC RMS for 1Minute
 - 工作范围 : -55℃~+105℃
 - 外壳盐雾 : 48H以上
- 材料:
 - 胶 芯 : PBT rated
 - 端 子 : 铜合金
 - 外 壳 : 铁合金/铜合金/不锈钢
前壳镀镍后壳镀锡/钝化
 - 螺 母 : 铜合金, 镀镍
 - 铜 柱 : 铜合金, 镀锡
 - 螺 丝 : 铜合金/铁合金, 镀镍

- 15315011201-X 50 F X X XX C X X X X X
1 2 3 4 5 6 7 8 9 10 11 12 13
1. 系列编号:
15315011201=DP50母座车针直针系列
 2. 做法区分:
A=光孔 B=前铆实心螺母 C=后铆空心螺母
D=前铆空心螺母 I=铆铜柱 J=铆锁
 3. PIN位区分:
50=50PIN
 4. 公母区分:
F=母
 5. 塑胶区分:
1=PBT白胶 2=PBT黑胶
 6. 端子材质区分:
H=黄铜 P=磷铜
 7. 端子电镀u数区分:
01=1u金 AA=1.5u金 02=2u金.....
 8. 端子规格区分:
C=常规
 9. 外壳区分:
1=铁壳 2=铜壳 3=不锈钢钝化 4=不锈钢镀镍
 10. 前铆实心螺母区分:
A=5.8实心螺母
 11. 前后铆空心螺母区分:
A=4.0空心螺母 B=5.8空心螺母
 12. 铜柱区分:
A=6.0铜柱
 13. 铆锁螺丝区分:
5=4.8螺丝 6=5.8螺丝
A=4.8铜螺丝 B=5.8铜螺丝

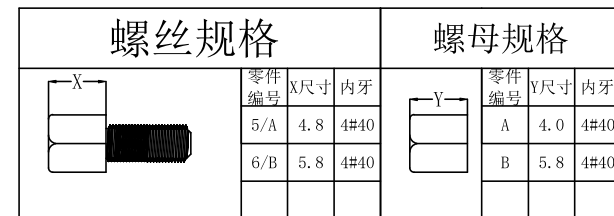

Dwg. No.		15D000006		DP50母座车针 180度直插板系列				
Projection					P/N		15315011201	
Unit	mm	Scale	NOT TO SCALE		Date	2025/8/1	Ver. NO	1.0
Type	D-Sub	Sheet	1/1					