材质:Material:
绝缘体:Insulator:Glass filled PBT UL94V-0,Blue
接触件:Contacts:Male-Brass,Female-Phosphor Bronze
电镀层:Plating:Contact Gold plating over Nickel
电气性能:Electrical Characteristics:
接触电阻:Contact Resistance:30mm max. at DC 100mA
绝缘电阻:Insulator Resistance:1000M min. at 500V DC
耐压:Withstanding Voltage:1000V AC/ms 50Hz For 1 minute
工作电流:Current Rating:2 AMP
使用温度范围:Operating Temperature:-55℃~+105℃
电缆规格:Cable:1.27mm (0.050") pitch flat cable
*Standard Gold Flash

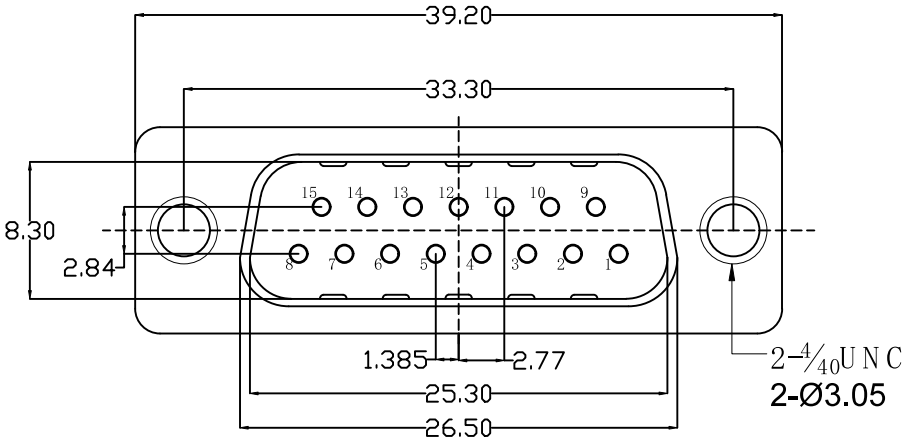

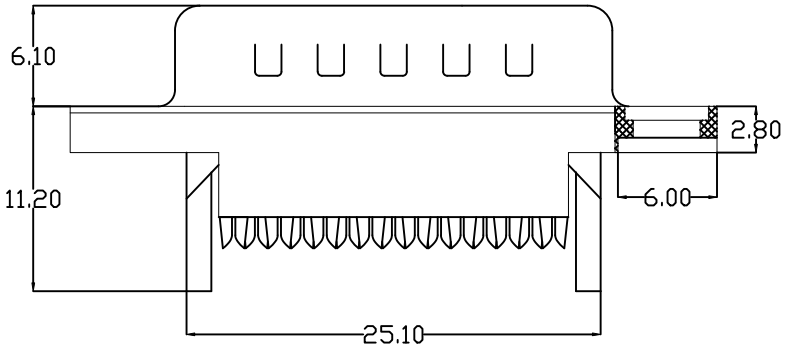

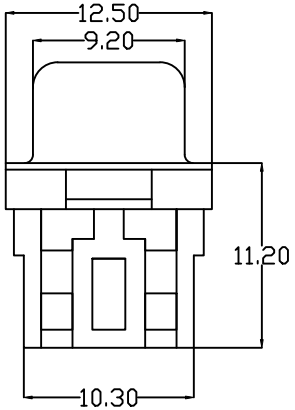

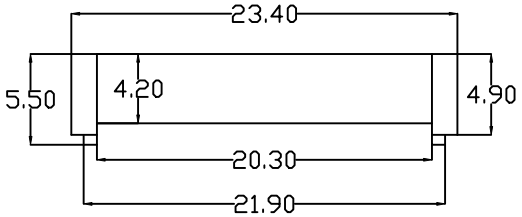

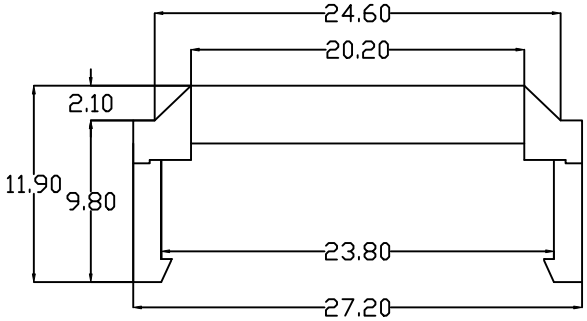

Dwg. No.		15D000057		压排15公铆合 压接式	寰导 hnndo		
Projection					P/N	15911540101	
Unit	mm	Scale	NOT TO SCALE				
Type	D-Sub	Sheet	1/1		Date	2025/8/1	Ver.NO 1.0