

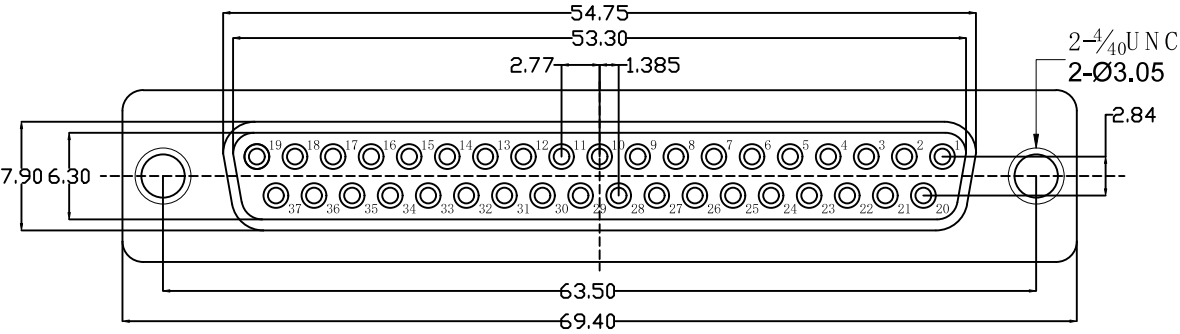
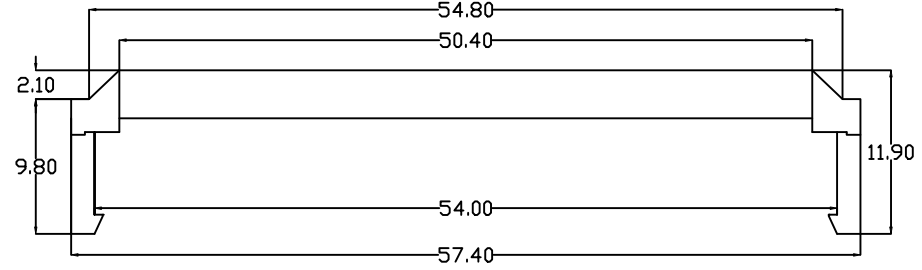
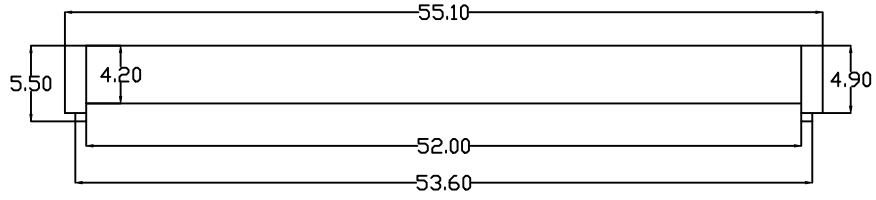




材质:Material:
绝缘体:Insulator:Glass filled PBT UL94V-0, Blue
接触件:Contacts:Male-Brass, Female-Phosphor Bronze
电镀层:Plating:Contact Gold plating over Nickel
电气性能:Electrical Characteristics:
接触电阻:Contact Resistance:30mΩ max. at DC 100mA
绝缘电阻:Insulator Resistance:1000MΩ min. at 500V DC
耐压:Withstanding Voltage:1000V AC /rms 50Hz For 1 minute
工作电流:Current Rating:2 AMP
使用温度范围:Operating Temperature:-55℃ ~ +105℃
电缆规格:Cable:1.27mm (0.050") pitch flat cable
*Standard Gold Flash

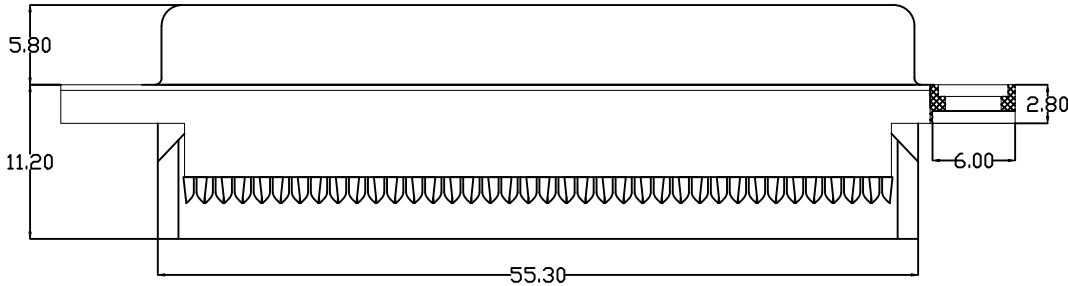

Dwg. No.		15D000062		压排37母铆合 压接式	寰宇 <i>hnndo</i>			
Projection								
Unit	mm	Scale	NOT TO SCALE		P/N	15913740201		
Type	D-Sub	Sheet	1/1		Date	2025/8/1	Ver. NO	1.0